

Trustworthy Link Failure Recovery Algorithm for Highly Dynamic Mobile Adhoc Networks

Y. Harold Robinson, M. Rajaram

Abstract—The Trustworthy link failure recovery algorithm is introduced in this paper, to provide the forwarding continuity even with compound link failures. The ephemeral failures are common in IP networks and it also has some proposals based on local rerouting. To ensure forwarding continuity, we are introducing the compound link failure recovery algorithm, even with compound link failures. For forwarding the information, each packet carries a blacklist, which is a min set of failed links encountered along its path, and the next hop is chosen by excluding the blacklisted links. Our proposed method describes how it can be applied to ensure forwarding to all reachable destinations in case of any two or more link or node failures in the network. After simulating with NS2 contains lot of samples proved that the proposed protocol achieves exceptional concert even under elevated node mobility using Trustworthy link Failure Recovery Algorithm.

Keywords—Wireless Sensor Networks, Predistribution Scheme, Cryptographic Techniques.

I. INTRODUCTION

RADITIONAL routing protocols may fail in a Mobile Adhoc Network (MANET) due to unpredictable network disconnectivity caused by mobility of the similar type of nodes [1]. Therefore, Opportunistic routing protocols have been initially proposed. Opportunistic routing [7] selects a best forwarder at each hop according to some metrics such as distance to the intention, link steadiness and throughput with high performance. To prevent routing information from becoming stale Geographic routing [8] is used to exploit the one-hop neighbour's information about the spatial details. A modified routing hole is about to be implemented when no forwarders are found [10]. Hence, a back-up mode algorithm is required to enable routing around the hole in an effective and efficient manner [9].

II. REVIEW OF LITERATURE

Several Geographic Opportunistic routing protocols that enhance reliability have been proposed earlier. The main methods which are proposed are discussed in the following:

A. Simple Opportunistic Adaptive Routing Protocol (SOAR)

Rozner, Seshadri et al. proposed Simple Opportunistic Adaptive Routing Protocol (SOAR) [2] which selects the default path and a list of forwarding nodes based on Expected

Transmission Count (ETX). This protocol achieves high throughput and deals efficiently with equality. Nevertheless, intervallic capacity and distribution of link quality drains node energy.

B. Geographic Opportunistic Routing (GOR)

Kai Zeng et al. analysed Geographic Opportunistic Routing (GOR) using the one-hop throughput metric, namely Expected One-hop Throughput (EOT) [3]. The disadvantage is that the proposal fails to discuss the effect of retransmission of packets.

C. Virtual Routing Protocol (VRP)

Luiz Carlos P. Albini et al. proposed the Virtual Routing Protocol (VRP) [4] which defines a logical structure over the physical network to build routes. Although the protocol is found to achieve high packet release probability, Virtual Routing Protocol performs very poorly under huge traffic conditions.

D. Greedy Perimeter Stateless Routing (GPSR)

Brad Karp and H.T. Kung proposed Greedy Perimeter Stateless Routing (GPSR) [5] protocol which makes greedy forwarding decisions using one-hop information. When greedy forwarding is unworkable, the GPSR algorithm recover by routing around the boundary of the section. This protocol has a small number of disadvantages. The beacons result in a constant level of routing protocol traffic and location lookup increases the overhead of GPSR.

E. Extremely Opportunistic Routing Protocol (ExOR)

Sanjit Biswas and Robert Morris proposed Extremely Opportunistic Routing Protocol (ExOR) [6], which chooses the forwarder with the lowest remaining cost to the final target node. Though it transmits each packet fewer times causing less interference, the ExOR header grows with the batch size and many transfers may only have a few packets.

III. PROPOSED ROUTING PROTOCOL

Best Forwarder Selection Opportunistic Routing protocol is designed to achieve maximum reliability in a mobile adhoc network by attractive the packet delivery ratio.

Fig. 1 shows the architecture design of Best Forwarder Selection Opportunistic Routing Protocol. For randomly deployed nodes, the distance and link metrics calculations enable best forwarder selection. On delivery a forwarding failure signal, a Trustworthy Link Failure Routing Algorithm is used for the link failure between source and the destination nodes dynamically. When a probable forwarder is to create the

Harold Robinson Y. is Research Scholar with the Information and Communication Engineering, Anna University, Chennai, India (e-mail: yhrobinphd@gmail.com).

Prof.Dr. M. Rajaram is the Vice-chancellor of Anna university, Chennai, India (e-mail: rajaramgct@rediffmail.co.in).

normal Best Forwarder Selection Opportunistic Routing algorithm is invoked.

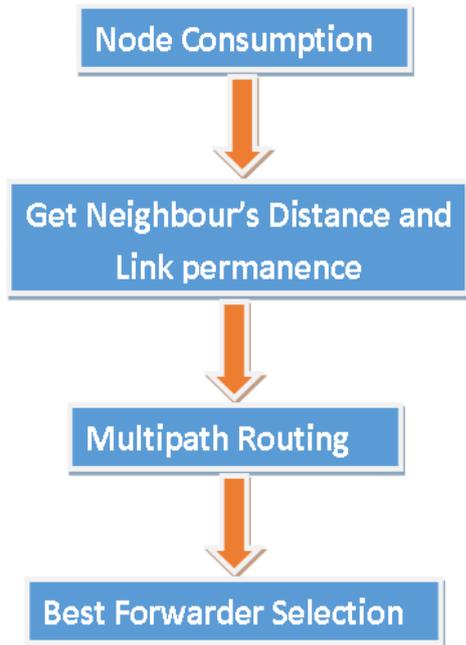


Fig. 1 Architecture Design of Best Forwarder Selection Opportunistic Routing

Distance calculation between any source or destination nodes, say node a and node b is based on Euclidean distance given by (1):

$$d = \sqrt{(a - b)^2 + (c - d)^2} \quad (1)$$

where a and b are the x-coordinates of nodes a and b respectively and c and d are the y-coordinates of nodes a and b respectively.

Frii's free-space equation [9] is used to obtain the free space reception power of a receiver antenna separated from a transmitting antenna by a distance d. When system loss L is included [10], the equation becomes,

$$P_r(d) = \frac{P_t S T w^2}{(4\pi d)^2 L} \quad (2)$$

where, P_t = Power transmitted by transmitter; S = receiver gain of transmitter; T = receiver gain of receiver; w = Wavelength; d = Euclidean distance between the sender and receiver; L = System loss.

A link with maximum P_r is considered more stable compared to its neighbors and hence reliable for packet transmission.

The source node obtains the address of the destination from a location registration and lookup service. It attaches destination's address to the packet header. The node which makes positive progress towards the destination and with the maximum power for reception gets the highest priority to become the best forwarder. Candidate nodes are selected from the forwarding area. The candidate list is attached to the

packet header and the packet is transmitted. The best forwarder nodes cache the packets which have to be delivered. If the best forwarder fails to transmit the packets within a threshold time, the candidate node with the next highest priority transmits the packet. All other nodes get suppressed on hearing the transmission and drop the cached packets.

Fig. 2 illustrates the Source node S and Destination node D. R is the radius of the broadcast range of source node S. The nodes in the area enclosed within the dashed arc make positive progress towards the destination. From unfailure source nodes, the one with maximum power for reception is chosen as node B is the best forwarder node.

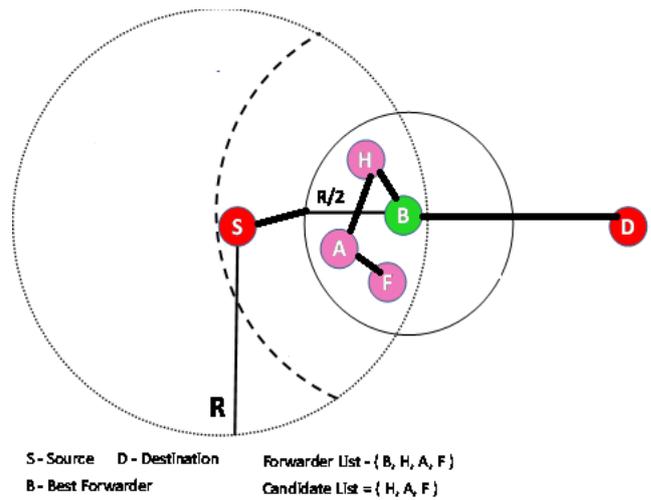


Fig. 2 Best forwarder and Candidates Selection

From the above diagram, the Forwarder List and Candidate List can be calculated using the Source and Destination nodes.

IV. TRUSTWORTHY LINK FAILURE RECOVERY ALGORITHM

- Trustworthy Link Failure Routing Algorithm is given below
- Step 1.If any failure of link between nodes is detected then Go to Step 2
 - Step 2.Go to step 4 for link recovery
 - Step 3.Else data packet is transmitted from source to destination
 - Step 4.TLFR is activated
 - Step 5.The intermediate node receives RERR act as the source node
 - Step 6.Select the first entry in the RBT stack as the immediate node
 - Step 7.Create modified path using RBT information in each node
 - Step 8.Transmit data packets via modified path to destination
 - Step 9.Update the new route with replace the existing route to the source node.

V.PERFORMANCE EVALUATION

The performance of Best Forwarder Selection Opportunistic Routing is evaluated through a simulation study using NS-2.34.

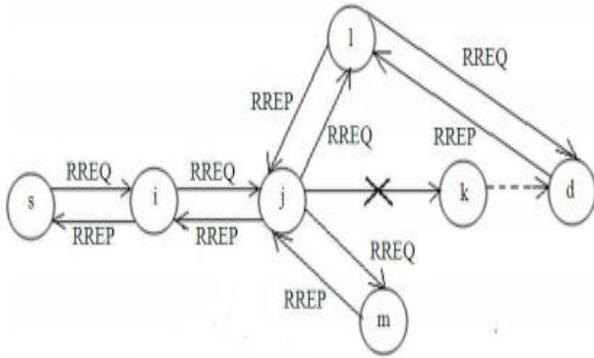


Fig. 3 Implementation of TLFR Algorithm

TABLE I
SIMULATION PARAMETERS

Parameter	Value
Number of nodes	160
Transmission range	225 m
Speed	10, 30, 50, 100 m/s
Network topology	800 x 800 m ²
Antenna model	Omni antenna
Transmitter antenna gain	1 dBi
Receiver antenna gain	1 dBi
System loss factor	1.0
Transmitter signal power	0.28 watts
Propagation model	Two-ray ground
Simulation time	200 sec

A. Performance Metrics

- **Packet Delivery Ratio:** This ratio of the number of data packets received at the destination to the number of data packets sent by source.
- **End-to-end-delay:** This time taken for a packet to be transmitted from the source to the destination.
- **Path Length:** This average end-to-end number of hops for successful packet delivery.
- **Packet forwarding times per hop:** The average number of times a packet is being forwarded to deliver a data packet over each hop given by,

$$FTH = \frac{N_s + N_f}{\sum_{i=1}^{N_r} N_{hi}} + t \quad (3)$$

where N_s is the Number of packets at the source, N_f is the Number of packets at the forwarded, and N_r are the number of packets received at the destination respectively. N_{hi} is the number of hops for the i^{th} packet that is successfully delivered.

- **Packet forwarding times per packet (FTP):** The average number of times a packet is being forwarded to deliver a data packet from the source to the destination given by,

$$FTP = \frac{N_s + N_f}{N_r} + t \quad (4)$$

B. Comparative Analysis

The performance of Best Forwarder Selection Opportunistic Routing is compared with Position-based Opportunistic Routing (POR) protocol. In Fig. 5 Best Forwarder Selection Opportunistic Routing is found to achieve high packet

delivery ratio, therefore performs reliable delivery of packets.

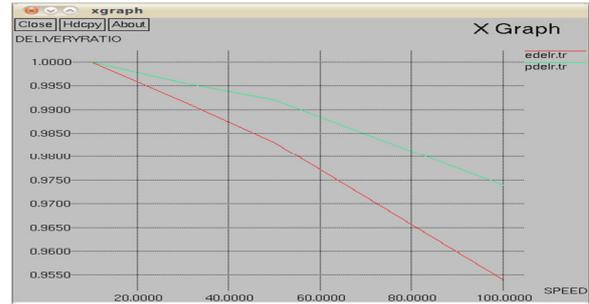


Fig. 4 Comparison graph for Packet Delivery Ratio

In Figs. 5 and 6, the packet forwarding times per hop and the number of forwarding times per packet are significantly reduced in Best Forwarder Selection Opportunistic Routing. The candidate nodes can be accounted for such an improved performance.

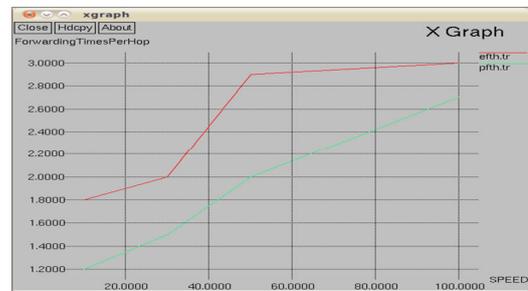


Fig. 5 Comparison graph for FTH

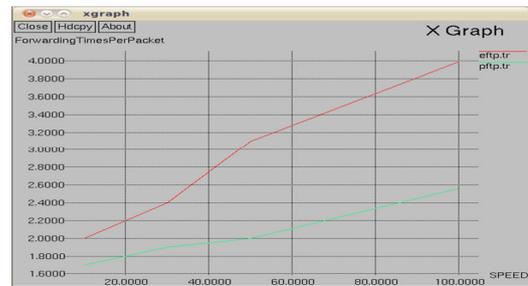


Fig. 6 Comparison graph for FTP

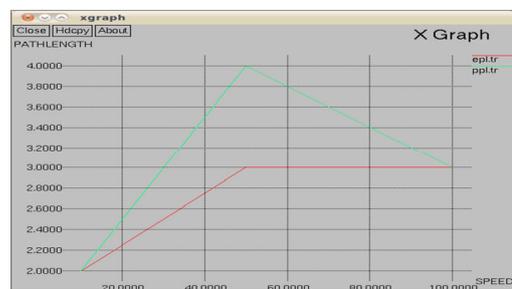


Fig. 7 Comparison graph for Path Length

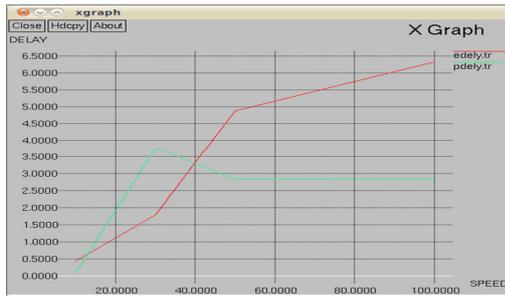


Fig. 8 Comparison graph for End-to-end delay

VI. CONCLUSION

Since distance metric has not been considered for forwarder selection for large number of nodes, the path length may not be always minimal causing a varying end-to-end delay. The Polynomial time for the Forwarded selection has been reduced. Using Trustworthy Link Failure Recovery Algorithm reduces the Number of Link Failures.

REFERENCES

- [1] Shengbo Yang, Chai Kiat Yeo, and Bu Sung Lee, "Toward Reliable Data Delivery for Highly Dynamic Mobile Ad Hoc Networks", *IEEE Transactions on Mobile Computing*, Vol. 11, No. 1, Jan 2012
- [2] Rozner, E., Seshadri, J., Mehta, Y. Lili Qiu, "SOAR: Simple Opportunistic Adaptive Routing Protocol for Wireless Mesh Networks", *IEEE Transactions on Mobile Computing*, Volume: 8, Issue: 12, Page(s): 1622 - 1635, Dec. 2009
- [3] Kai Zeng, Wenjing Lou, Jie Yang, Donald R. Brown III, "On Throughput Efficiency of Geographic Opportunistic Routing in Multihop Wireless Networks", *Springer, Mobile Networks Application* (2007) 12:347-357, 2007
- [4] Luiz Carlos P. Albini, Antonio Caruso, Stefano Chessa and Piero Maestrini, "Reliable Routing in Wireless Ad Hoc Networks: The Virtual Routing Protocol", *Journal of Network and Systems Management*, Vol 14, No. 3, 2006
- [5] Brad Karp, H. T. Kung, "GPSR: Greedy Perimeter Stateless Routing for Wireless Networks", *Proceedings of the 6th Annual ACM/IEEE International Conference on Mobile Computing and Networking (MobiCom 2000)*, 2000.
- [6] Sanjit Biswas, Robert Morris, "ExOR: opportunistic multi-hop routing for wireless networks", *Proceedings of conference on Applications, technologies, architectures, and protocols for computer communications*, Pages 133-144, 2005
- [7] A. Trivino-Cabrera, S. Canadas-Hurtado, "Survey on Opportunistic Routing in Multihop Wireless Networks", *International Journal of Communication Networks and Information Security (IJCNIS)*, Vol. 3, No. 2, August 2011
- [8] Dazhi Chen, Pramod K. Varshney, "A Survey of void handling techniques for geographic routing in wireless networks", *IEEE communications survey*, 1st Quarter, Vol.9, No. 1, 2009
- [9] Jochen Schiller, *Mobile Communications - Second edition*, Pearson Education, 2009
- [10] Stepanov, D. Herrscher, K. Rothermel, "On the impact of radio propagation models on MANET simulation results", *Proceedings of 7th International Conference on Mobile and Wireless Communications Networks (MWCN 2005)*, Marrakech, Morocco, September 2005.

Y. Harold Robinson is currently working as an Assistant Professor, dept of CSE in SCAD College of engineering and Technology, Tirunelveli. He finished ME degree in Anna University, Chennai. He is Pursuing his Ph.D from Anna University Chennai. His research interests are Wireless networks Mobile Computing, Wireless Sensor Networks. He has published several Research papers in International Journals. He has presented many papers in National and International conferences in Network security, Mobile Computing and Cloud Computing.

Prof. Dr. M. Rajaram M.E., Ph.D is the Vice-Chancellor of Anna University, Chennai. As a research guide, Dr.M.Rajaram produced 30 Ph.D's and four M.S. scholars in various fields. At present, 10 research scholars are pursuing their Ph.D. under his direct supervision. He has contributed to the areas of Computer Networks, High Voltage Engineering, Measurement and Instrumentation, Adaptive Controller, Electro-Magnetic Theory, and Intelligent Computing with his 157 publications in renowned research journals, 111 research publications in International Conferences, 73 research publications in National Conferences, more than 100 technical reports and six technical books some of which he has co-authored.